


AEM Electrolyser EL 4.0 LC



Enapter's patented anion exchange membrane (AEM) electrolyser is a standardized, stackable and flexible system to produce on-site hydrogen. The modular design – paired with advanced software integration – allows set up in minutes and remote control and management. Stack this electrolyser to achieve the required hydrogen flowrate.

Specifications

Enapter
AEM Electrolyser EL 4.0 LC

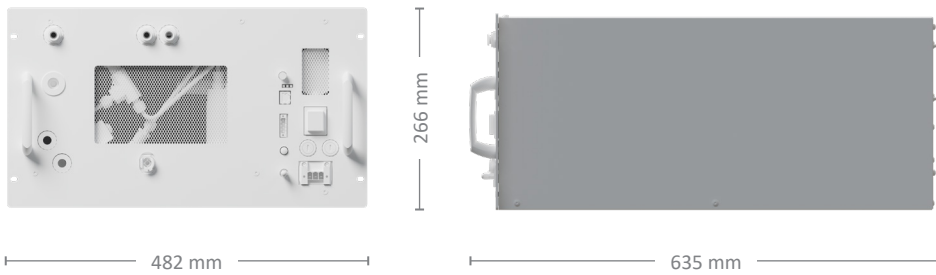

| | |
|---|---|
| Production rate | 500 NL/h, 1.0785 kg/24h |
| Hydrogen output purity | 35 bar: 99.9% (1000 - 1500 ppm H ₂ O) 8 bar: > 7000 - 9000 ppm H ₂ O |
| Output pressure | Up to 35 barg |
| Nominal power consumption per Nm³ of H₂ produced | 4.8 kWh/Nm ³ , beginning of life |
| Operative power consumption | 2.4 kW, beginning of life |
| Peak power consumption | 3 kW |
| Max heat dissipation (ambient) Max heat dissipation (cooling line) | 0.5 kW 0.5 kW |
| Power supply | 200 - 240 V(AC), 50/60 Hz |
| Maximum water input conductivity | 20 μS/cm at 25 °C |
| Water consumption | ~ 400 mL/h |
| Water input pressure range | 1 - 4 barg |
| Cooling water pressure range | 2 - 7 barg |
| Cooling water temperature range | 5 °C - 40 °C |
| Cooling water flow | ~ 2 L/min, tap-water quality |
| Ambient operative temperature range | 5 °C to 50 °C |
| Ambient operative humidity range | Up to 95% Rh, non-condensing |
| IP rating | IP 20 |
| Dimensions | W: 482 mm × D: 635 mm × H: 266 mm |
| Weight | 37 kg |
| Space inside cabinet | 6 U |

Specifications

Enapter
AEM Electrolyser EL 4.0 LC

Control and monitoring

Fully automatic with Enapter's EMS via 2.4 GHz Wi-Fi and Bluetooth, Modbus TCP over Ethernet

Conformity

CE (2006/42/CE), S.E.P. Classified (2014/68/EU PED), EN ISO 12100, IEC 61508, EN IEC 61000-6-3, EN IEC 61000-6-2, ISO 22734 ready
